

GT1600



Description

NEW: 2 Megapixel CCD camera for ITS and outdoor imaging - GigE Vision®



The Prosilica GT1600 is a 2 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT1600 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. The GT1600 offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure and gain without the need for additional control elements.

- Sony ICX274 progressive scan CCD sensor
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, multiple LUT, color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- **Models:**
 - GT1600, 1620x1220, 25 fps, CCD mono
 - GT1600C, 1620x1220, 25 fps, CCD color

Specifications

Prosilica GT		1600	
Interface	IEEE 802.3 1000baseT		
Resolution	1620 x 1220		
Sensor	Sony ICX274		
Sensor type	CCD Progressive		
Sensor size	Type 1/1.8		
Cell size	4.4 µm		
Lens mount	C-Mount		
Max frame rate at full resolution	25 fps		
A/D	14 bit		
On-board FIFO	128 MB		
Output			
Bit depth	8/14 bit		
Mono modes	Mono8, Mono12Packed, Mono16		
Color modes YUV	YUV411, YUV422, YUV444		
Color modes RGB	RGB24, BGR24, RGBA24, BGRA24		
Raw modes	Bayer8, Bayer12Packed, Bayer16		
General purpose inputs/outputs (GPIOs)			
TTL I/Os	1 input, 2 outputs		
Opto-coupled I/Os	1 input, 2 outputs		
RS-232	1		
Operating conditions/Dimensions			
Operating temperature	-20°C ... +60°C		
Power requirements (DC)	POE, 7-25 VDC		
Power consumption (12 V)	3.3 W @ 12 VDC		
Mass	211 g		
Body Dimensions (L x W x H in mm)	83.2 x 53.3 x 33 (including connectors, w/o tripod and lens)		
Regulations	CE, FCC Class A, RoHS (2002/95/EC)		

[Download the Prosilica GT1600 technical drawing](#)

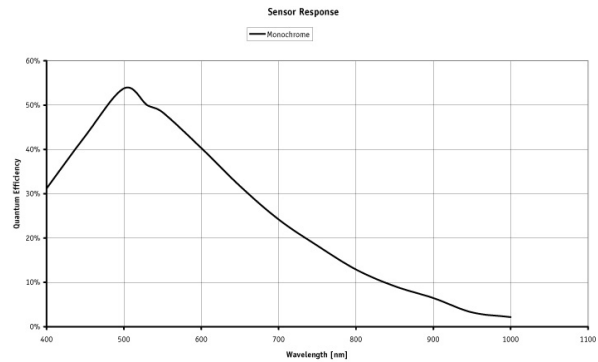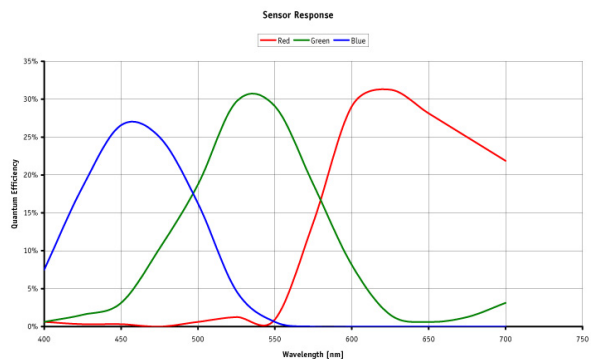

Smart features

The Prosilica GT1600 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Multiple LUT
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and Multiframe Acquisition Modes

White Paper

[Remote lens control with Prosilica GT cameras](#)

Applications

The Prosilica GT1600 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- machine vision
- Military and space applications