

GT2300



Description

NEW: 4 Megapixel CCD camera for extreme environments - fast frame rates



The Prosilica GT2300 is a 4 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT2300 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. It offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure and gain without the need for additional control elements.

- Kodak KAI-04050 CCD sensor
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, multiple LUT, color correction
- Metadata (Chunk data), clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- **Models:**
 - GT2300, 2336x1752, 29 fps, CCD mono
 - GT2300C, 2336x1752, 29 fps, CCD color

Specifications

Prosilica GT 2300	
Interface	IEEE 802.3 1000baseT
Resolution	2336 x 1752
Sensor	Kodak KAI-04050
Sensor type	CCD Progressive
Sensor size	Type 1
Cell size	5.5 µm
Lens mount	C-Mount
Max frame rate at full resolution	29 fps
A/D	14 bit
On-board FIFO	128 MB
Output	
Bit depth	8/14 bit
Mono modes	Mono8, Mono12Packed, Mono16
Color modes YUV	YUV411, YUV422, YUV444
Color modes RGB	RGB24, BGR24, RGBA24, BGRA24
Raw modes	Bayer8, Bayer12Packed, Bayer16
General purpose inputs/outputs (GPIOs)	
TTL I/Os	1 input, 2 outputs
Opto-coupled I/Os	1 input, 2 outputs
RS-232	1
Operating conditions/Dimensions	
Operating temperature	-20°C ... +60°C
Power requirements (DC)	POE, 7-25 VDC
Power consumption (12 V)	5.4 W @ 12 VDC
Mass	229 g
Body Dimensions (L x W x H in mm)	92 x 53.3 x 33 (including connectors, w/o tripod and lens)
Regulations	CE, FCC Class A, RoHS (2002/95/EC)

[Download Prosilica GT2300 Technical drawing](#)

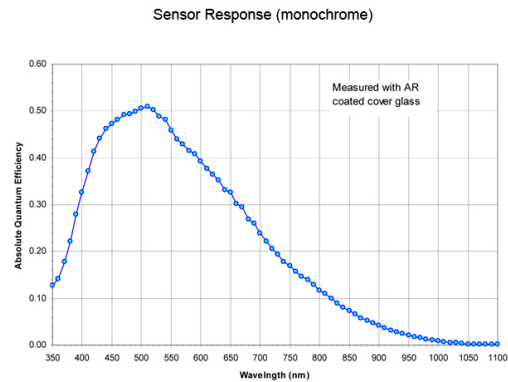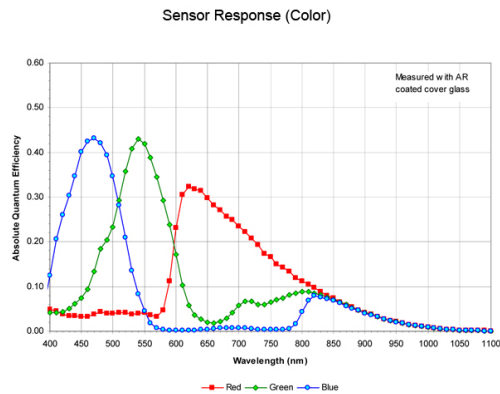

Smart features

The Prosilica GT2300 features include:

- Auto Exposure
- Auto Gain
- Auto White balance
- Flexible Binning
- Region of Interest readout (AOI partial scan)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Multiple LUT
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and Multiframe Acquisition Modes

White Paper

[Remote lens control with Prosilica GT cameras](#)

Applications

The Prosilica GT2300 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- machine vision
- Military and space applications