

❖ CM-140 GE-UV Progressive Scan

C3 Camera Suite
Unlimited
Digital
Switchability



- Member of C3 Compact series, covering VGA to UXGA resolution
- 1392 (h) x 1040 (v) 4.65 μm square pixels
- 1/2" progressive scan - Monochrome and Bayer mosaic color versions
- 16 frames/second with full resolution in continuous operation
- Increased frame rate with vertical binning (CM-140 GE) and partial scan
- Exposure time from 31 μs to 2 sec. using Pulse Width trigger mode
- Programmable exposure from 61.2 μs to 32.2 ms
- Sequencer trigger mode for on-the-fly change of gain, exposure and ROI
- LVAL-synchronous/-asynchronous operation (auto-detect)
- Auto iris lens video output allows a wider range of light
- GigE Vision interface with 10 or 8-bit output
- Programmable GPIO with opto-isolated inputs and outputs
- Comprehensive software tools and SDK for Windows XP/Vista

GigE™
VISION




Specifications for CM-140 GE-UV

Specifications	CM-140 GE-UV
Sensor	1/2" progressive scan
Pixel Clock	33.75 MHz
Frame rate full frame	16.14 frames/second (1052 lines per frame)
Active area	6.4 (h) x 4.8 (v) mm
Cell size	4.65 x 4.65 pixels
Active pixels	1392 x 1040
Color (CB-140 GE)	Raw Bayer output, host-based interpolation
Read-out modes	
Full	1392 (h) x 1040 (v) 16 fps
1/2 partial scan	1392 (h) x 520(v) 24.16 fps
1/4 partial scan	1392 (h) x 260 (v) 32.16 fps
1/8 partial scan	1392 (h) x 130 (v) 38.41 fps
2/3 partial scan	1392 (h) x 694 (v) 20.76 fps
Vertical binning	1392 (h) x 520 (v) 25.37 fps*
Region-of-interest (ROI)	User definable. Memory read-out *NOTE: CM-140 GE only
Sensitivity (CM-140 GE)	0.25 Lux (On sensor, max. gain, shutter off, 50% video)
S/N ratio	>50dB (0dB gain)
Video output	GigE Vision, 8-bit or 10-bit
Auto-iris lens video output	0.7 Vp-p, enabled by internal switch
Gain	Manual, -3 to +12 dB
Synchronization	External hardware trigger via GPIO Software trigger via GigE Vision
GPIO Module	
Input/output switch	Configurable 14-in/9-out switch (LUT)
Clock generator (one)	12-bit counter based on 25MHz clock or Pixel Clock
Pulse generators (four)	20-bit counters programmable for length, start point, stop point, repeat
Hardware trigger modes	Continuous, Pre-Select, Pulse Width, Sequence (Gain, Shutter, ROI) Reset-continuous trigger, Delay Readout
Electronic shutter	
Pre-set shutter	1/31 to 1/10,000 in 10 steps
Programmable exposure	2L (61.2µs) to 1052L (32.2ms) in 1L steps
Exposure Time (Abs)	µsec - user definable. Same range as PE
Pulse Width	31µs to 2 sec.
Control interface	Register based. GigE Vision/GenICam compliant
Functions controlled via GigE Vision interface	Shutter, Gain, Black level, Trigger mode, Readout mode, GPIO setup, ROI (GenICam mandatory functions)
GigE Vision streaming control	Packet size (1428 to 4040 bytes), Delayed (frame) Readout, Inter-packet delay
Indicators on rear panel	Power / Hardware trigger, GigE link, GigE activity
Operating Temperature	-5°C to +45°C
Humidity (operation)	20 - 90% non-condensing
Storage temp./humidity	-25°C to +60°C / 20 to 90%
Vibration	10G (20Hz to 200 Hz XYZ)
Shock	70G
Regulations	CE (EN 61000-6-2, EN-61000-6-3), FCC part 15 class B, RoHS/WEEE
Power	12V DC +/-10%. 4.1W
Lens mount	C-mount
Dimensions (H x W x L)	29 x 44 x 75 mm
Weight	125 g

Connector pin-out

DC In / GPIO




HIROSE HR10A-10R-12PB-01

Connector Pin-out

- Pin 1 GND
 2 +12 V DC input
 3 Opto in 2(-)* / GND
 4 Opto in 2(+)* / Auto iris lens
 5 Opto in 1(-)
 6 Opto in 1(+)
 7 Opto out 1(-)
 8 Opto out 1(+)
 9 Opto out 2(-)
 10 Opto out 2(+)
 11 +12V DC input
 12 GND

* Pins 3 and 4 can be configured by internal switch selection


GigE Vision interface Accepts RJ-45 with thumbscrews




- Pin 1 TRD+(0) 5 TRD-(2)
 2 TRD-(0) 6 TRD-(1)
 3 TRD+(1) 7 TRD+(3)
 4 TRD+(2) 8 TRD-(3)

Dimensions


Front view




Side view




Bottom view



Rear view



Spectral Response CM-140 GE-UV

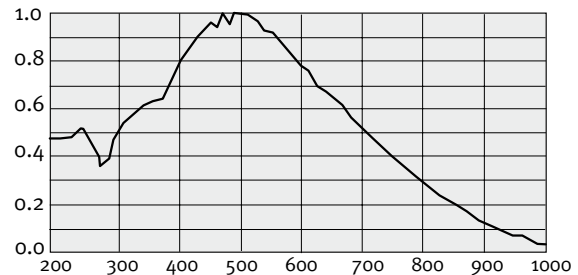

Ordering Information

CM-140 GE-UV 1/2" Monochrome Progressive Scan Camera

C3 Camera Suite Unlimited Digital Switchability

Europe, Middle East & Africa
 Phone +45 4457 8888
 Fax +45 4491 3252

Asia Pacific
 Phone +81 45 440 0154
 Fax +81 45 440 0166

Americas
 Phone (Toll-Free) 1 800 445 5444
 Phone +1 408 383 0300



See the possibilities

Visit our web site on www.jai.com