


L series | IP dome camera

# LD2222

## 1080P HD Microdome IP Camera

www.meritlilin.com



- ▶ Microdome IP camera
- ▶ One-way audio supported
- ▶ 1080p resolution
- ▶ Audio / Motion detection alarm function
- ▶ Built-in highly sensitive microphone



Dimensions: (unit: mm)

Ø 105 x 39


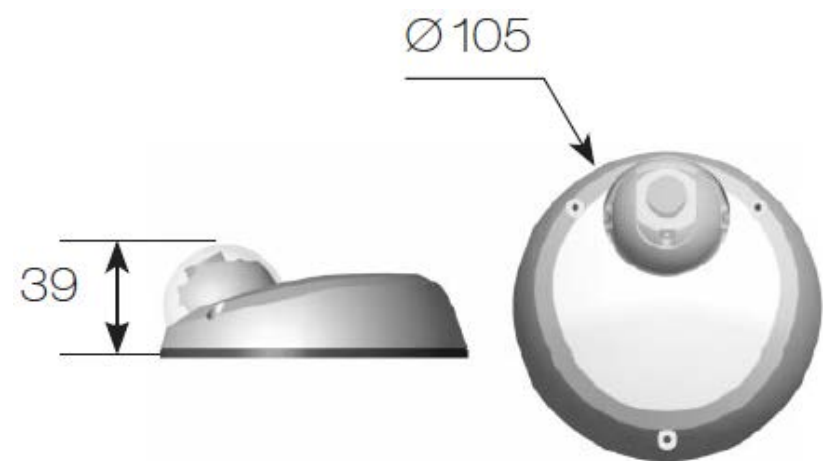


Diagram of mounting holes: unit in mm

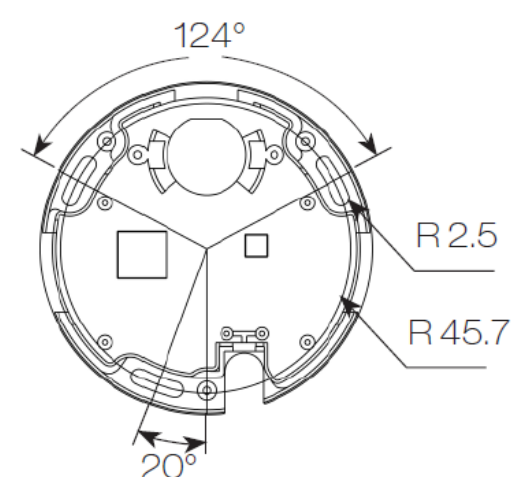

Fixed dome LD2222 in the L series is featuring built-in Sense up+ technology to deliver stunning video in low-light conditions. Utilizing intelligent image signal processing, 2D WDR function, AGC control, and 3D Noise Reduction, the combination successfully delivers the ultimate low-light image without motion blur. Support with PoE, privacy mask, White balance, and minimum illumination 0.6 Lux at F1.6 Low Light Mode or 0.8 Lux at F1.8 Low Light Mode.

## Video Security App

Available on Android and iOS – **LILINViewer** app provides security alarm push notification, real-time live viewing, and remote video playback



## ONVIF-compliant

Open Network Video Interface Forum (ONVIF) is a standard for physical IP based security products. LD2222 camera is ONVIF Profile S conformant



## Privacy Masking

Privacy Masking is a feature used to protect personal privacy by concealing private areas in the camera's field of view. Doorways and house windows for example are not subject to surveillance




## Sense Up+

Deliver outstanding video outputs in poor light conditions without experiencing motion blur. You can see video clearly even during nighttime without sufficient lighting support



## Back Light Compensation

Back Light Compensation (BLC) adjusts the exposure of the entire image to properly expose the subject in the foreground. No matter if the main object is moving toward left, right, upper, lower, or any location in the screen, BLC provides perfect exposure for an object in front of strong back light

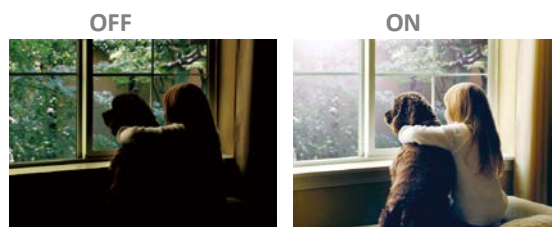

## Motion Detection

Detect motion and capture the event. Motion in the selected area will provoke an alert.



## 3D Noise Reduction

Remove noise from a signal. Suppressing noise in an image in low light conditions and able to retain quality videos at the same time



## Wide Dynamic Range (WDR)

Wide Dynamic Range (WDR) displays details of both the brightest and darkest areas. WDR can extend image visibility under high contrast lighting scenes and improve image quality



## 1080P HD Microdome IP Camera

### Video performance

Model#	LD2222E2	LD2222E4
Low Light Mode (Colour)	0.8 Lux at F1.8	0.6 Lux at F1.6
2D WDR	Off / x2 / x3 / x4	

### Power

Power consumption	DC12V, 4.5W / PoE, 5W	
PoE	IEEE 802.3af	
Power supply	DC12V ±10%	
	Power over Ethernet (IEEE 802.3af compliant)	

### Sensor

Sensor type	1/2.7" CMOS image sensor	
Total sensor pixels	1920 (H) x 1080 (V) = 2,073,600 pixels	

### Lens

Model#	LD2222E2	LD2222E4	
Focal length	2.8mm	4mm	
Iris	F1.8	F1.6	
Angle of View	H	114°	84.8°
	V	64°	45.2°
	D	134°	100.6°

### Environmental

Operating temperature	-25°C ~ +50°C (-13°F ~ 122°F)
-----------------------	-------------------------------

### PC requirement

CPU	Intel Pentium 4 1.8GHz or above
OS	Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8
RAM	1GB or above, Independent Display Card

### Mechanical

Dimensions	Ø 105 x 39mm
Weight	250g approx.

### Certifications

CE	<b>Emission</b> EN 55022:2010 Class A IEC 61000-3-2:2014 IEC 61000-3-3:2013
FCC	<b>Emission</b> FCC Part 15: Subpart B (10-1-10 Edition) Class A CISPR 22: 2008 Class A

### Video streaming

Video compression	H.264 , Motion JPEG
Streaming	RTP/HTTP, RTP/TCP, RTP/UDP, Multicast Multiple configurable streams in H.264 and M-JPEG, configurable frame rate and bandwidth
Bitrate	128Kbps ~ 5Mbps Frame rate and bitrate controllable on-the-fly VBR / CBR / GOP supported
IP filter	Yes
RTSP Authentication	On / Off

### Video resolution (H x V)

1080p HD	1920 x 1080
720p HD	1280 x 720
D1	720 x 480
CIF	352 x 240
Maximum frame rate	H.264 : up to 15 fps @ 1920 x 1080 , 30fps @ 1280 x 720 , 30fps @ 720 x 480 Motion JPEG : up to 15 fps @ 1920 x 1080 , 30 fps @ 720 x 480 , 30 fps @ 352 x 240

### Video functions

Scanning system	Progressive scan
Chip size	5.856mm (H) x 3.276mm (V)
Adjustable picture setting	Contrast, Brightness, Saturation
White balance	Auto / Tungsten / Indoor / Fluorescents1 / Fluorescents2 / Outdoor1 / Outdoor2
Shutter	1/30(1/25)s to 1/8000s
Back light compensation	On / Off
3D noise reduction	Off / 1 to 32 selectable
Privacy masking	Four independent areas
Sense Up	Off / 1 frame / 2 frames / 3 frames / 7 frames
Sense Up+	Yes
Auto gain control	36 dB variable gain
Other functions	Sharpness, Image flip, Image mirror, Hue
D/N quality setting	Yes

### Integration

Mobile application	Integrated to LILIN mobile app (LILINViewer) iPhone, iPad, Android support
Video management	ONVIF Profile S LILIN NAV 1.0 Third party VMS through LILIN HTTP API
Web browser	Microsoft® Internet Explorer® 6.0 and later
Firmware	Firmware upgrade via HTTP
Alarm functions	Motion /audio detection triggering recording into SD card Image upload over FTP and E-mail by audio / motion detection
Alarm event	FTP,SMTP, HTTP post, SD card, SAMBA
Alarm weighted mode	Yes

### Network

Ethernet	10Mbps / 100Mbps Base-T, RJ-45
Connectivity	ONVIF Profile S
Users	8 simultaneous users
Digital zoom	Yes
OSD	Text overlay for date, time and camera name
CPU, Memory	Embedded SoC ARM11, 528MHz, 256MB DDR2, 256MB flash memory
Video display	LILIN Universal ActiveX & LILIN Java Applet
OS	Embedded Linux 2.6.32
Protocols	IP, TCP, UDP, HTTP, SMTP, NTP, DDNS, UPnP, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTCP, Telnet, ICMP, IGMP, ONVIF Profile S, SNMP, SIP, Bonjour
Multi IP address	Yes

### Network security

User accounts	10 user accounts available
Access	Multiple user access levels with password protection
Encryption	Base 64 HTTP encryption