

L series | IP dome camera

LR2522

1080P HD IR IP Eyeball Dome Camera

www.meritlilin.com



2-way audio



Back Light Compensation



SD card recording



Day/Night



Infrared



IP based



- ▶ Stylish eyeball IR IP dome camera
- ▶ IR cut filter for day/night operations
- ▶ 10-metre infrared night vision
- ▶ 1080p resolution


Dimensions: (unit: mm)

Ø 100 x 85




Fixed dome LR2522 in the L series is featuring built-in Sense up+ technology to deliver stunning video in low-light conditions. Utilizing intelligent image signal processing, 2D WDR function, AGC control, and 3D Noise Reduction, the combination successfully delivers the ultimate low-light image without motion blur. Support with PoE, privacy mask, White balance, and minimum illumination 0.15 Lux at F1.6 / 0.18 Lux at F1.8 Low Light Mode.

Diagram of mounting holes: unit in mm

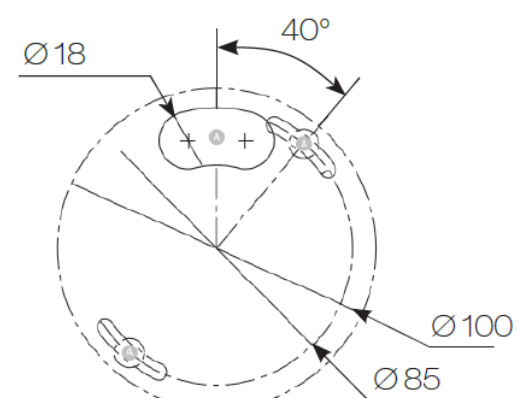

Built-in IR Illumination

LR2522 IP camera with infrared (IR) illumination where IR LEDs are built-in. Built-in with IR LED, the camera provides night vision up to 10 metres



Video Security App

Available on Android and iOS – **LILINViewer** app provides security alarm push notification, real-time live viewing, and remote video playback




SD Cards in Sync with NAV Software

LR2522 camera with built-in Micro SD/SDHC card slots can provide redundant video viewing and recording. You can synchronize an SD card with LILIN VMS (Video Management Software) – Navigator (NAV)



Back Light Compensation

Back Light Compensation (BLC) adjusts the exposure of the entire image to properly expose the subject in the foreground. No matter if the main object is moving toward left, right, upper, lower, or any location in the screen, BLC provides perfect exposure for an object in front of strong back light

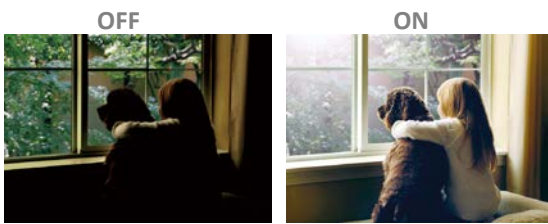

3D Noise Reduction

Remove noise from a signal. Suppressing noise in an image in low light conditions and able to retain quality videos at the same time



Alarm Detection

Alarm Detection is designed to provide the electronic detection of intruders



Motion Detection

Detect motion and capture the event. Motion in the selected area will provoke an alert.



ONVIF-compliant

Open Network Video Interface Forum (ONVIF) is a standard for physical IP based security products. LR2522 camera is ONVIF Profile S conformant



Day and Night Operations via Removal of the IR-cut filter

LR2522 camera was designed using a mechanical IR cut filter for increased IR sensitivity resulting in improved night time images. The removable IR-cut filter allows day and night operations even in the low lux condition providing outstanding vision



Sense Up+

Deliver outstanding video outputs in poor light conditions without experiencing motion blur. You can see video clearly even during nighttime without sufficient lighting support



Two-way Audio Support

With 2-way audio communication, you can project your voice through the camera's speaker instead of hearing what's going on



Wide Dynamic Range (WDR)

Wide Dynamic Range (WDR) displays details of both the brightest and darkest areas. WDR can extend image visibility under high contrast lighting scenes and improve image quality



Privacy Masking

Privacy Masking is a feature used to protect personal privacy by concealing private areas in the camera's field of view. Doorways and house windows for example are not subject to surveillance



Audio Detection

With Audio Detection technology, an alarm is triggered based on ambient sound conditions as the threshold



1080P HD IR IP Eyeball Dome Camera			
Video performance			
Model#		LR2522E4	LR2522E6
Low Light Mode (Colour)		0.08 Lux at F1.6	0.08 Lux at F1.6
With Infrared		0.0 lux	
2D WDR		Off / x2 / x3 / x4	
Power			
Power consumption		DC12V, 7.5W / PoE, 8.5W	
PoE		IEEE 802.3af	
Power supply		DC12V ±10%	
		Power over Ethernet (IEEE 802.3af compliant)	
Sensor			
Sensor type		1/2.7" CMOS image sensor	
Total sensor pixels		1920 (H) x 1080 (V) = 2,073,600 pixels	
Lens			
Focal length		4mm	4mm
Iris		F2.0	F2.0
Angle of View	H	94 °	94 °
	V	545.2 °	31.4 °
	D	100.6 °	67.3 °
Night vision (infrared LED)			
Distance		10m	
Peak wavelength		850nm, high efficiency array	
Beam spread		30 °	
Environmental			
Operating temperature		-25°C ~ +50°C (-13°F ~ 122°F)	
PC requirement			
CPU		Intel Pentium 4 1.8GHz or above	
OS		Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8	
RAM		1GB or above, Independent Display Card	
Mechanical			
Dimensions		Ø 100 x 85mm	
Weight		280g approx.	
Input / output			
Audio input / output		Mono, 1.4 Vp-p , 50 KΩ , Terminal connector	
Alarm input / output		Digital 1 input (TTL, +3 – 5VDC) / 1 Output (MOS Relay contact N.O., Load max. 40VDC/300mA)	
Certifications			
CE		Emission	
		EN 55022:2010 Class A	
		IEC 61000-3-2:2005+A1:2008+A2:2009	
		IEC 61000-3-3:2013	
FCC		Emission	
		FCC Part 15: Subpart B (10-1-10 Edition) Class A	
		CISPR 22: 2008 Class A	

Video streaming	
Video compression	H.264 , Motion JPEG
Streaming	RTP/HTTP, RTP/TCP, RTP/UDP, Multicast Multiple configurable streams in H.264 and M-JPEG, configurable frame rate and bandwidth
Bitrate	128Kbps ~ 5Mbps Frame rate and bitrate controllable on-the-fly VBR / CBR / GOP supported
IP filter	Yes
RTSP Authentication	On / Off
Video resolution (H x V)	
1080p HD	1920 x 1080
720p HD	1280 x 720
D1	720 x 480
CIF	352 x 240
Maximum frame rate	H.264 : up to 15 fps @ 1920 x 1080 , 30fps @ 1280 x 720 , 30fps @ 720 x 480
	Motion JPEG : up to 15 fps @ 1920 x 1080 , 30 fps @ 720 x 480 , 30 fps @ 352 x 240
Video functions	
Day/Night (IR-cut filter)	Colour (Day), Monochrome (Night), Auto, Schedule
Scanning system	Progressive scan
Chip size	5.856mm (H) x 3.276mm (V)
Adjustable picture setting	Contrast, Brightness, Saturation
White balance	Auto / Tungsten / Indoor / Fluorescents1 / Fluorescents2 / Outdoor1 / Outdoor2
Shutter	1/30(1/25)s to 1/8000s
Back light compensation	On / Off
3D noise reduction	Off / 1 to 32 selectable
Privacy masking	Four independent areas
Sense Up	Off / 1 frame / 2 frames / 3 frames / 7 frames
Sense Up+	Yes
Auto gain control	36 dB variable gain
Other functions	Sharpness, Image flip, Image mirror, Hue
D/N quality setting	Yes
Integration	
Mobile application	Integrated to LILIN mobile app (LILINViewer) iPhone, iPad, Android support
Video management	ONVIF Profile S LILIN NAV 1.0 Third party VMS through LILIN HTTP API
SD card recording	Support Micro SD/SDHC card for circular recording (card is not included)
Web browser	Microsoft® Internet Explorer® 6.0 and later
Firmware	Firmware upgrade via HTTP
Alarm functions	Alarm / audio / motion detection triggering recording into SD card Image upload over FTP and E-mail by audio / motion detection
Alarm event	FTP,SMTP, HTTP post, SD card, SAMBA
Alarm weighted mode	Yes
Network	
Ethernet	10Mbps / 100Mbps Base-T, RJ-45
Connectivity	ONVIF Profile S
Users	8 simultaneous users
Digital zoom	Yes
OSD	Text overlay for date, time and camera name
CPU, Memory	Embedded SoC ARM11, 528MHz, 256MB DDR2, 256MB flash memory
Video display	LILIN Universal ActiveX & LILIN Java Applet
OS	Embedded Linux 2.6.32
2-way audio	G.711 / PCM
Protocols	IP, TCP, UDP, HTTP, SMTP, NTP, DDNS, UPnP, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTCP, Telnet, ICMP, IGMP, ONVIF Profile S, SNMP, SIP, Bonjour
Multi IP address	Yes
Network security	
User accounts	10 user accounts available
Access	Multiple user access levels with password protection
Encryption	Base 64 HTTP encryption